


70mm

110mm

NIIMBOT

Product Manual

Smart Label Printer

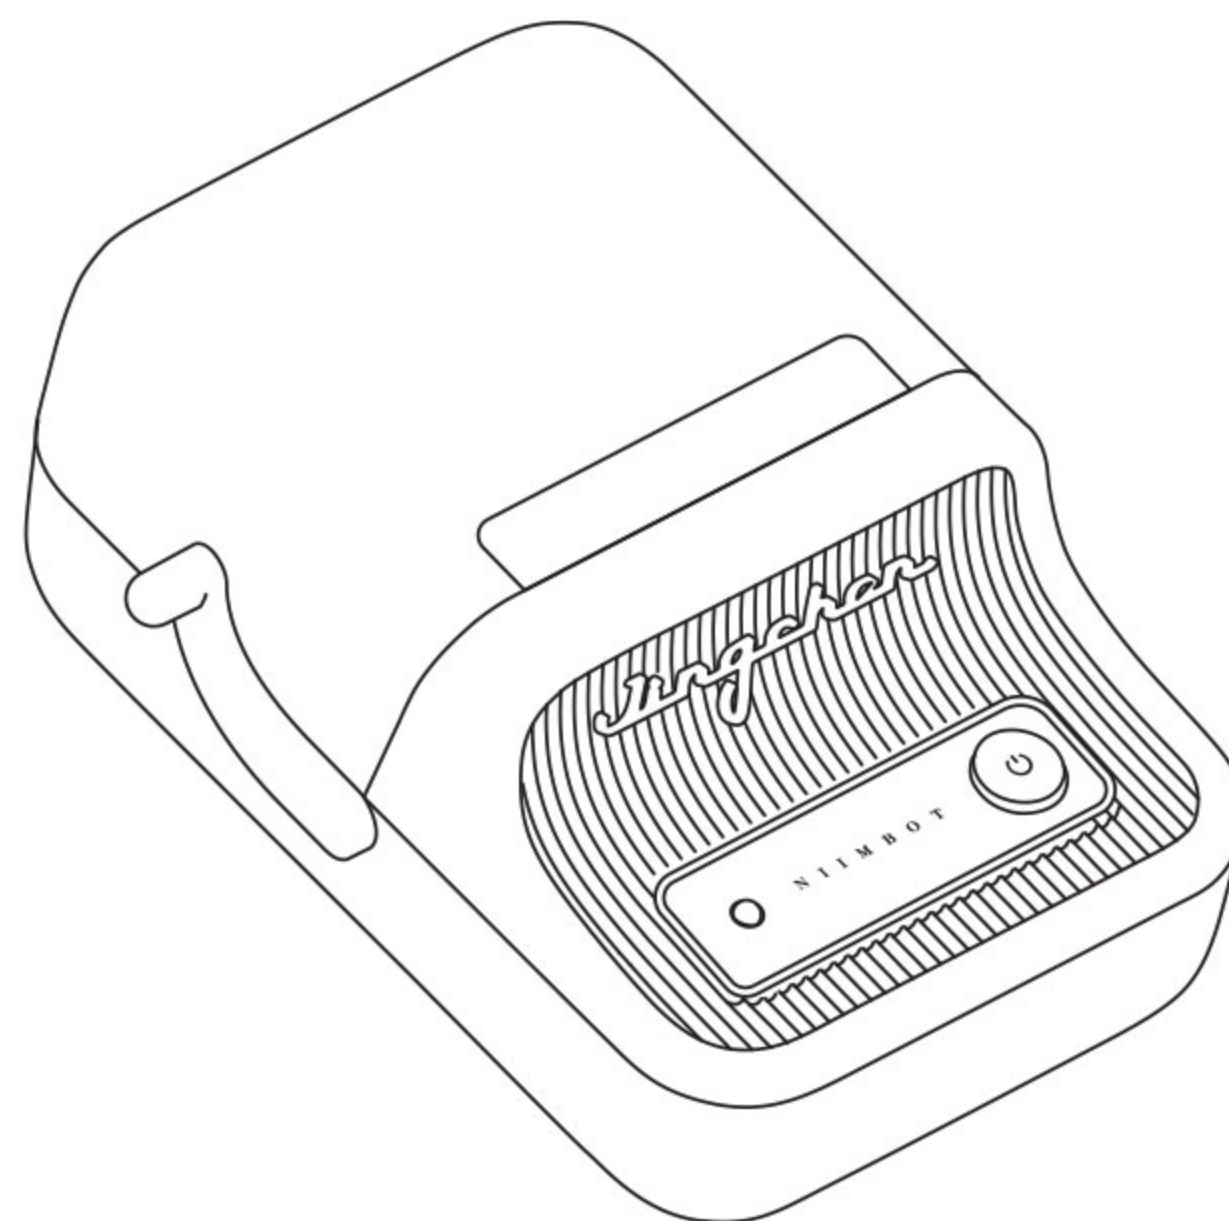

NIIMBOT B21_Pro

Notice: If the device cannot be turned on, please charge for one hour.

Wuhan Jingchen Intelligent Identification Technology Co., Ltd.

Support Email : service@niimbot.com

Official Website : www.niimbot.com

Manufacturer's Address : No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan District, Wuhan, China

© 2024 NIIMBOT. All Rights Reserved.

NIIMBOT is a brand under Wuhan Jingchen Intelligent Identification Technology Ltd.

单位: mm


印刷位移公差±1

名称	说明书-B21_Pro-英文-80g双胶纸	页数	16P	NIIMBOT精臣		
尺寸	70*110mm±1mm	材质	80g双胶纸			
装订	骑马钉	印刷	单色印刷	料号	33010267602	
工艺	/	版本	V1.0	设计	刘楠	

NIIMBOT

Product Manual

Smart Label Printer

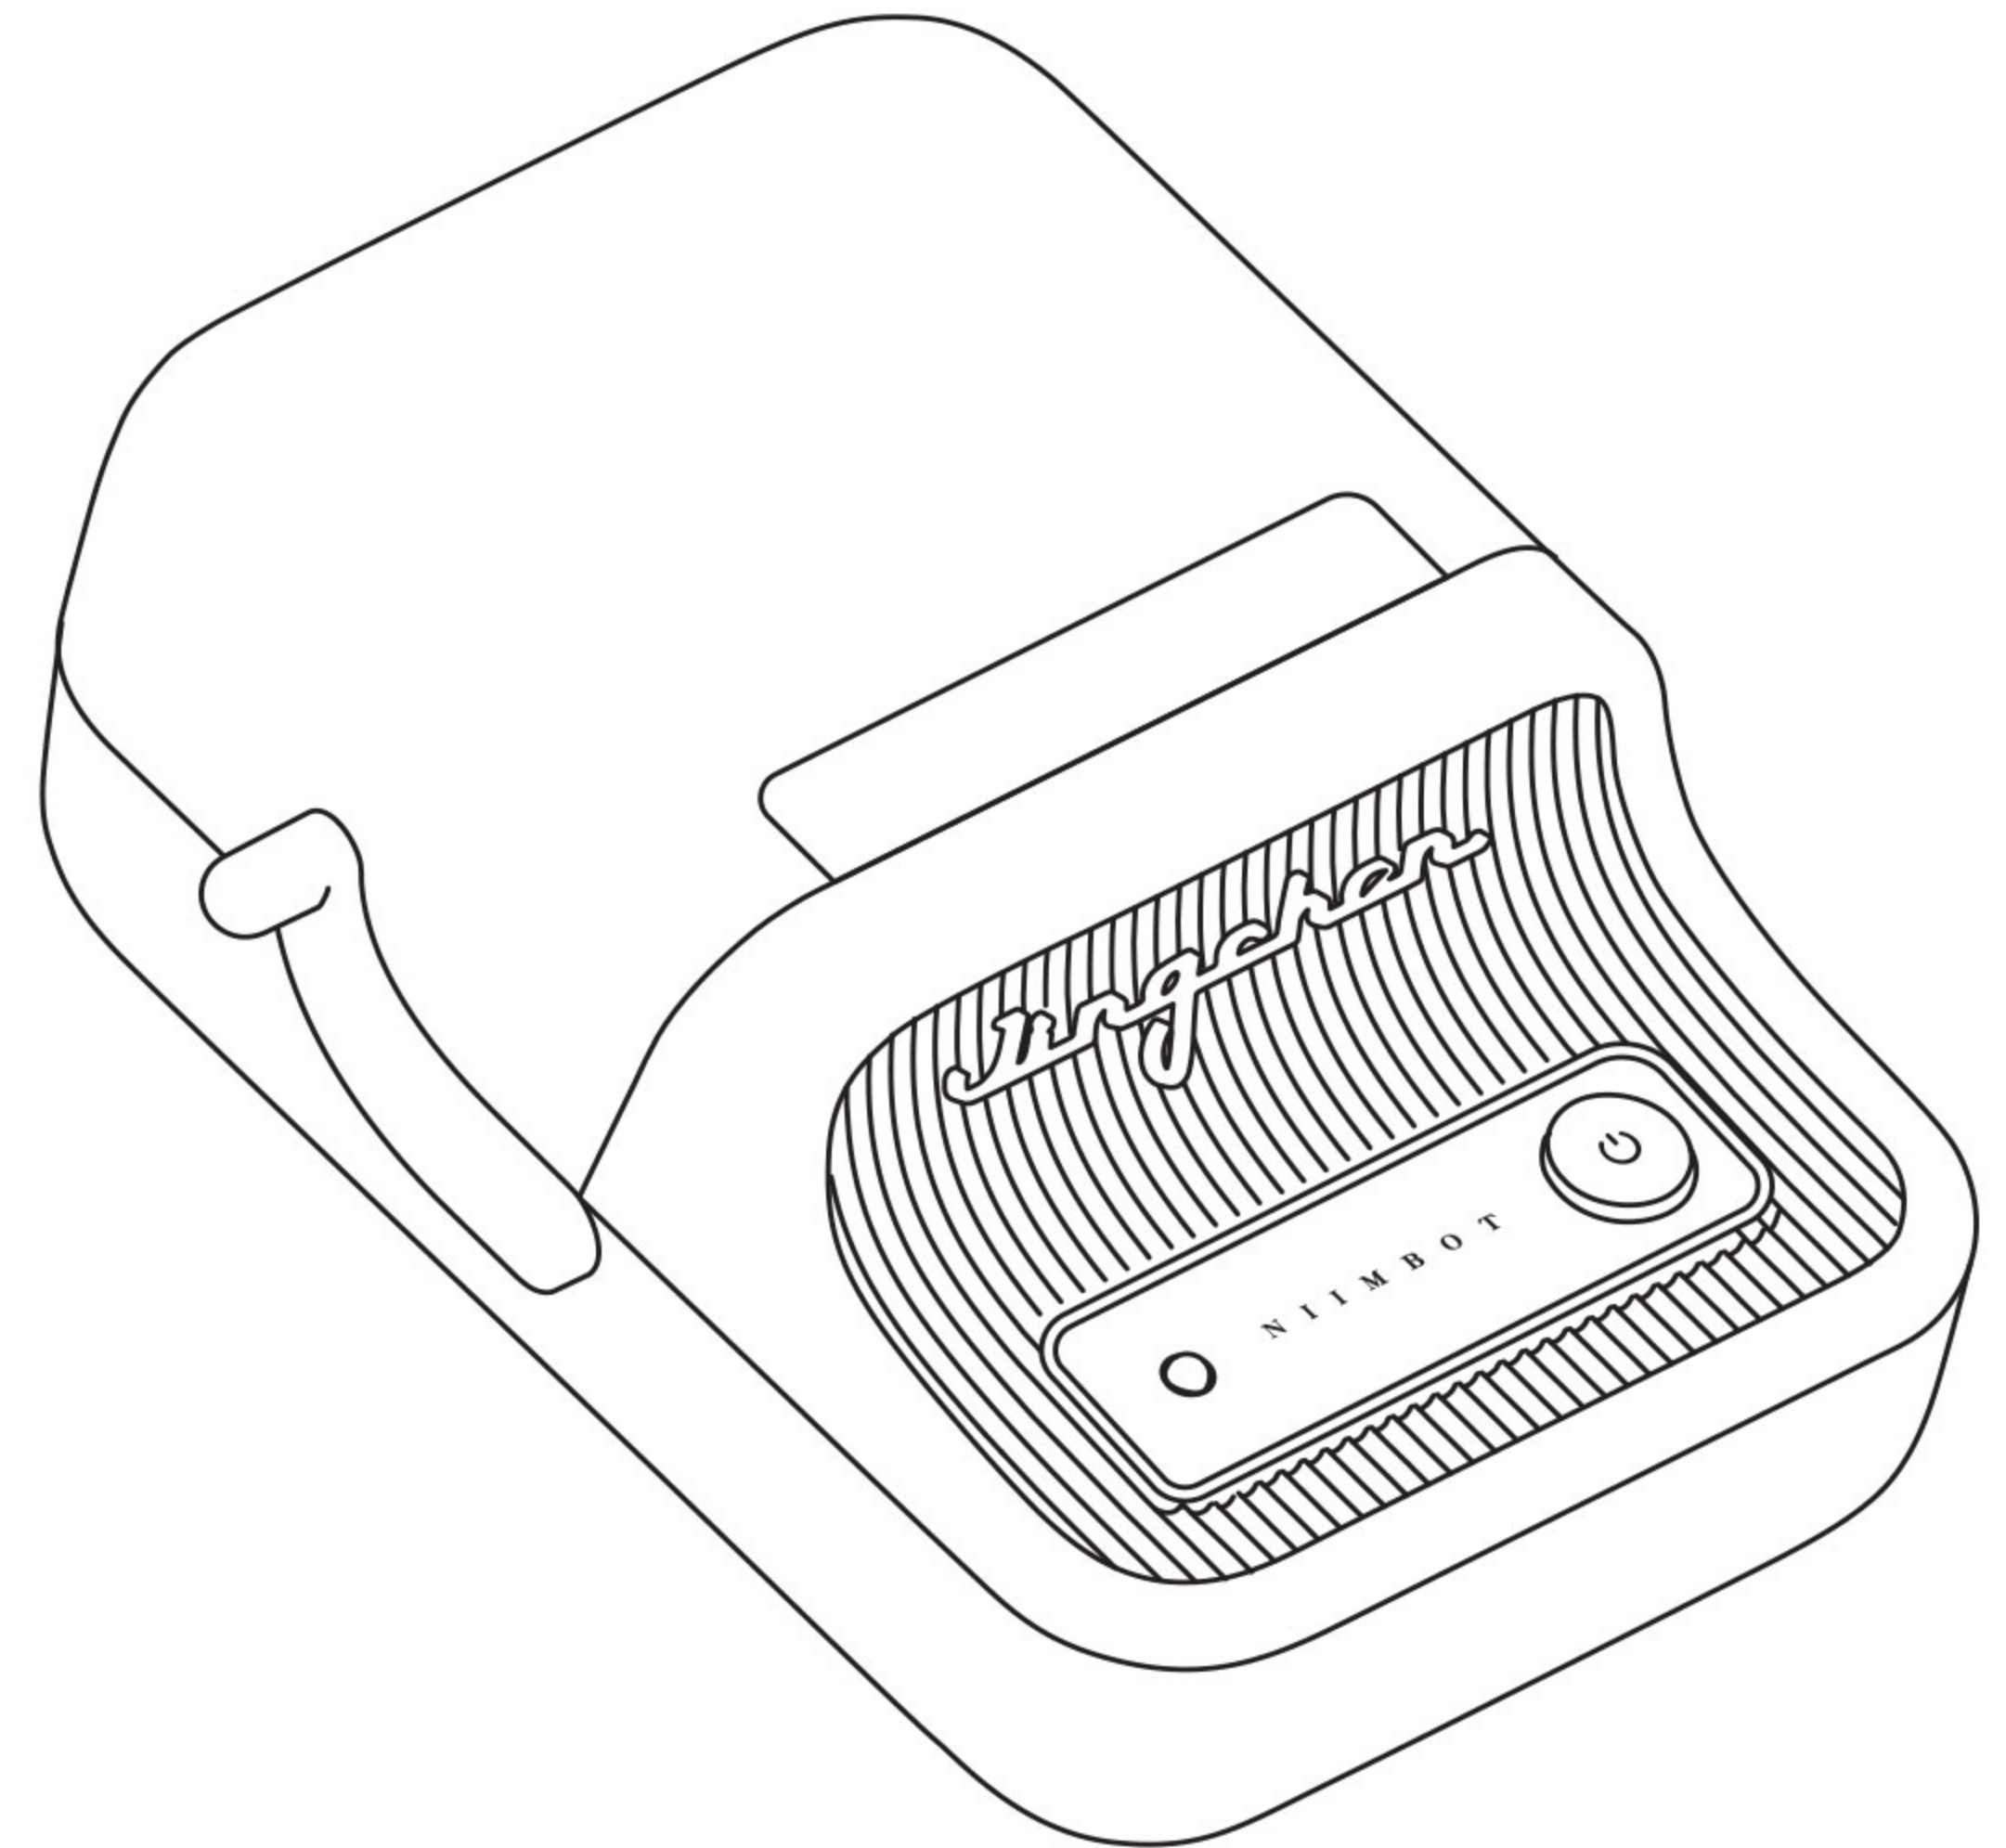

Notice: If the device cannot be turned on, please charge for one hour.

Wuhan Jingchen Intelligent Identification Technology Co., Ltd.

Support Email : service@niimbot.com

Official Website : www.niimbot.com

Manufacturer's Address : No. 5, Creative Workshop, Creative World, Yezhihu West Road, Hongshan District, Wuhan, China

© 2024 NIIMBOT. All Rights Reserved.

NIIMBOT is a brand under Wuhan Jingchen Intelligent Identification Technology Ltd.

NIIMBOT B21_Pro

CONTENTS


01 Package Contents	03
02 Installation	04
03 Download software	06
04 Connecting to Print	08
05 Basic operations	09
06 Meaning of Indicator Lights	10
07 Specifications	11
08 Safety Precautions	12

01

Package Contents




Smart Label Printer *1



Label Paper Roll *1




USB Type-C Cable *1




Product Manual *1

02

Installation

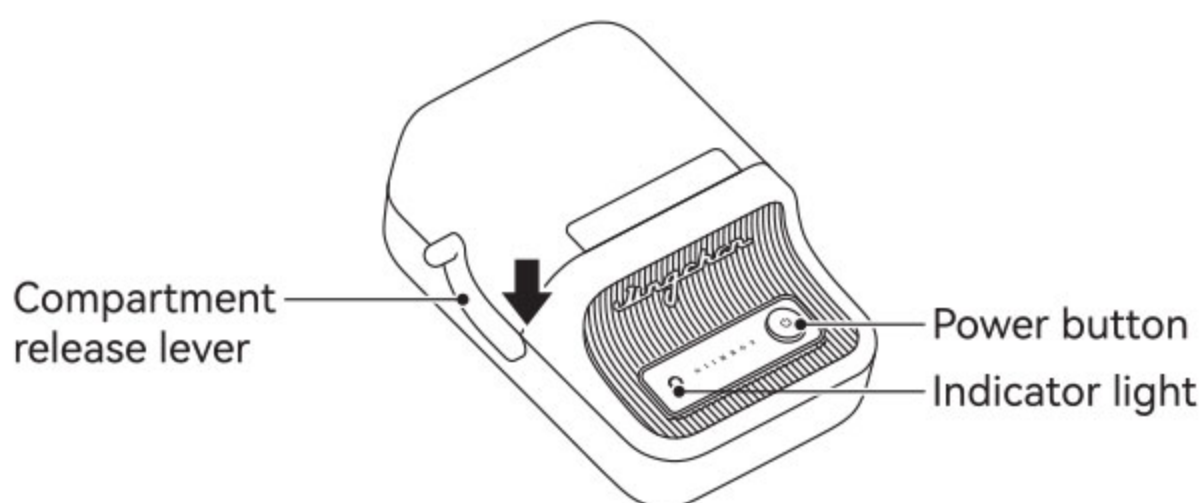


- 1 Press and hold the power button for 2-3 seconds to turn on the device, and press down on the compartment release lever to open the paper compartment.

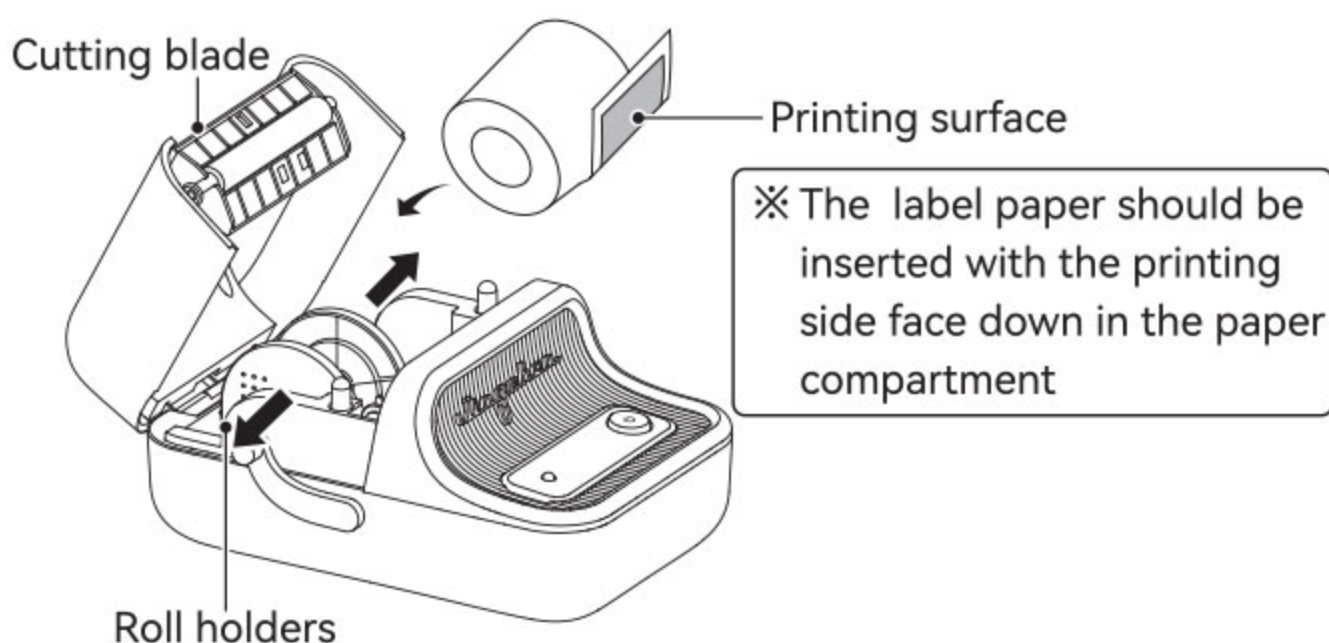

- 2 Push the roll holders to either side, then load the label paper into the paper compartment with the printing surface face-down.

⚠ The cutting blade is sharp. Exercise caution when the paper compartment cover is open.

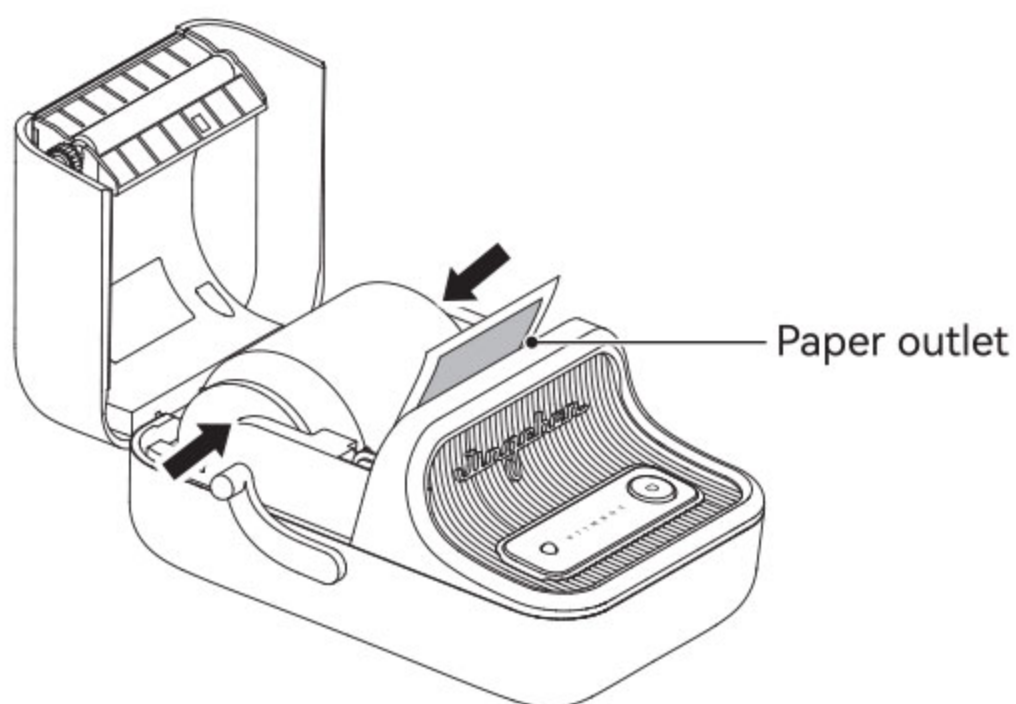

- 3 Slide the roll holders inward to secure the label paper, then pull the first label so that it protrudes from the paper outlet. Close the paper compartment cover.

03

Download software

01.Download App

- ① To use this product, please download and install the NIIMBOT app, available from Google Play or the App Store on Apple devices.



NIIMBOT
Design & Print APP
easy to download and use



※ More instructions can be viewed in the NIIMBOT app

Sign in to NIIMBOT ▶ Me ▶ Help Center ▶ Hardware

- ② We recommend downloading the NIIM app for home use to unlock more functions for household printing.



NIIM
Design & Print APP
easy to download and use



02.Download computer version


Visit the software downloads page on NIIMBOT's official website (www.niimbot.com) to download and install the computer version of "NIIMBOT".

※ Note: To connect a computer to this device, please use the officially provided data cable or a data cable that supports data transmission.

04

Connecting to Print

- 1 Once the app has downloaded, make sure your phone's Bluetooth is turned on.
※ Note: Location permissions may need to be enabled on Android phones.

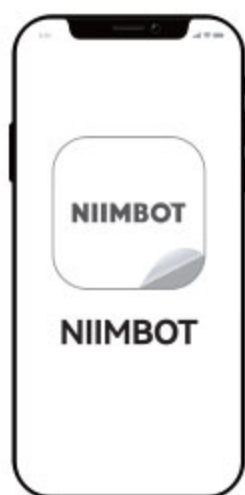

Turn on Bluetooth

- 2 Open the app and search for Bluetooth devices to connect to.
※ Note: If it asks for a PIN, enter 0000 or 1234 then press OK.
- 3 Once successfully connected, go to the Drawing Board.

Note

The illustrations of products, accessories, software interfaces, etc. in this getting started guide are illustrative in nature and for reference only. Due to product updates and upgrades, the physical product may differ slightly from the illustrations. Please refer to the actual physical product in such case. The product is subject to technical improvements without notice.

05

Basic operations

Function	Process
Turn on	Press and hold the power button for three seconds
Turn off	Press and hold the power button for three seconds while powered on
Feed paper	Press and hold the power button for three seconds while powered on
Print testing page	Press the power button twice while powered on

06

Meaning of Indicator Lights

Indicator light	Status	Meaning
Blue	Flashing	Upgrading firmware
Blue	Solid	Standby
Green	Flashing	Printing
Green	Solid	Bluetooth connected
Red	Flashing	Charging (When the device is turned off, the light will turn off once the battery is fully charged)
Red	Solid	Device fault

07

Specifications

Product	Label Printer	Model	NIIMBOT B21_Pro
Dimensions	130*94*61mm	Weight	320g
Charging Time	3 - 4 hours	Input	5V DC, 1A
Battery Capacity	1500mAh	Printing Method	Thermal printing
Printing Resolution	300dpi	Printing Width	48mm
Connectivity	Bluetooth, Type-C	Charge	Type-C
Transmit Power	4dBm(Maximum)	Operating Temperature	0°C - 40°C

08

Safety Precautions

Read all instructions and warnings in this guide carefully before using the product to ensure proper and safe use of the product and to avoid personal injury or damage to property.

*Warning



Do not disassemble the product yourself. No returns or exchanges will be authorized for disassembled products.



Do not use corrosive chemical products or cleaners to wipe down the product.



Do not use the product in the vicinity of flammable substances such as in gas stations, fuel depots, etc.

1. Keep the product and accessories in a safe place that is inaccessible to children, or only allow use under the supervision of a guardian.
2. Immediately disconnect the product from the power source if the product enters water.
3. Immediately disconnect the product if the device malfunctions.
4. If you use a power adapter to charge (or power) the device, you must purchase an adapter that is safe, compliant, and meets the standards.
5. Do not disassemble the product to replace the battery yourself. Incorrectly replacing the battery can result in an explosion.

6. The battery contains special protective circuitry and devices. Do not disassemble the battery as this may cause short circuits or electrolyte leakage. If electrolytes accidentally enter your eye, rinse immediately with clean water and seek medical advice.
7. Do not expose the appliance or power adapter to high-temperature or high-humidity environments, or put in water, to prevent short circuits that can cause the battery to become hot, smoke, deform, get damaged or even explode.
8. Disconnect the power adapter immediately if you notice either smoke or a smell coming from the product or the power adapter, taking care to avoid burns.

***Important**


Please purchase the version of the product that matches your region or country of use through the NIIMBOT official store or a NIIMBOT authorized sales agent. Purchasing the product through other channels may mean you buy a pirated product or a product not adapted to your region or country of use which may lead to usage issues. In such cases, NIIMBOT may be unable to provide you with further assistance.

01

Paket İeriđi



Akıllı Etiket Yazıcı *1



Etiket Kađıdı Rulosu *1




USB Type-C Kablosu *1




Ürün Kılavuzu *1

02

Kurulum

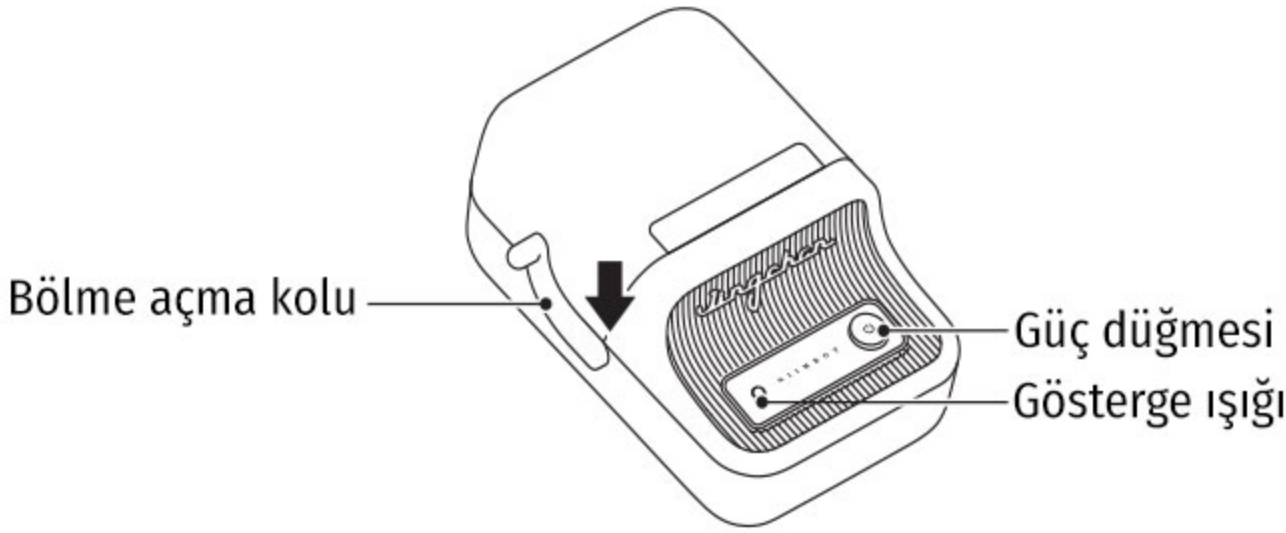


- 1 Cihazı açmak için güç düğmesine 2-3 saniye basılı tutun ve kağıt bölmesini açmak için bölme açma koluna bastırın.

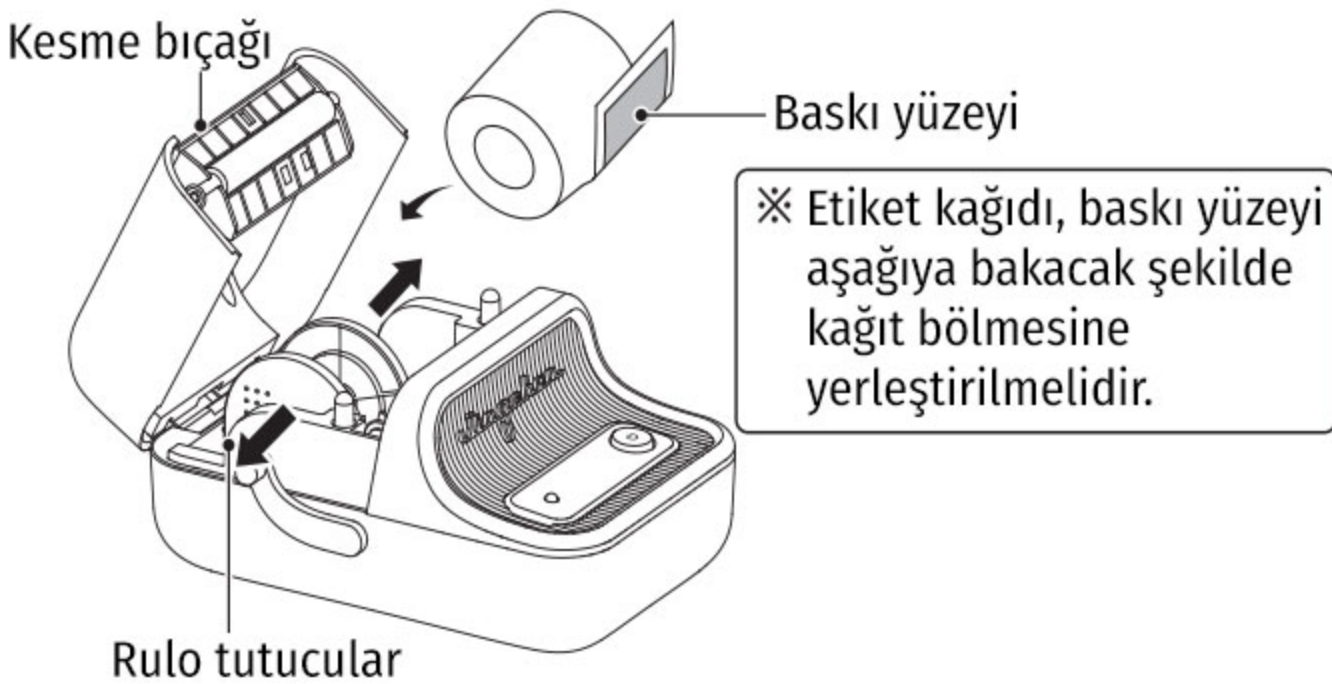

- 2 Rulo tutucuları iki yana itin, ardından etiket kağıdını baskı yüzeyi aşağıya bakacak şekilde kağıt bölmesine yerleştirin.



Kesme bıçağı keskindir. Kağıt bölmesi kapağı açıkken dikkatli olun.

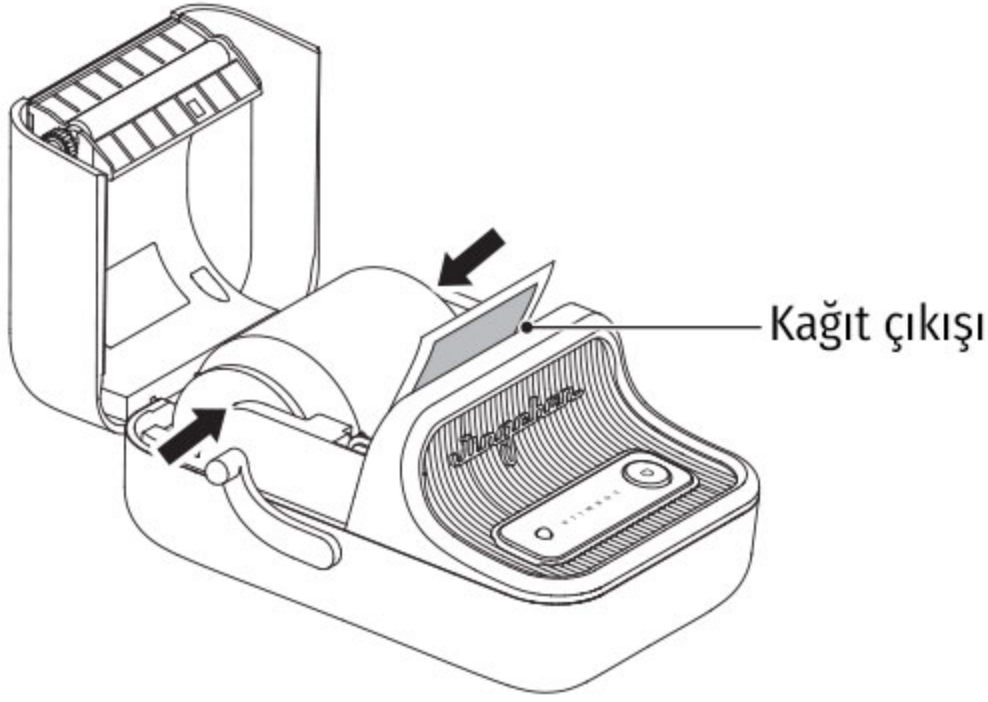

- 3 Etiket kağıdını sabitlemek için rulo tutucuları içeri doğru kaydırın, ardından ilk etiket kağıt çıkışından dışarı çıkacak şekilde çekin. Kağıt bölmesi kapağını kapatın.

03

Yazılımı İndirin

01.Uygulamayı İndir

- 1 Bu ürünü kullanmak için lütfen Google Play'den veya App Store'dan NIIMBOT uygulamasını indirip yükleyin.



NIIMBOT

Tasarım ve Baskı Uygulaması
indirmesi ve kullanımı kolay



※ Daha fazla talimatı NIIMBOT uygulamasında görüntüleyebilirsiniz

NIIMBOT'a giriş yapın ▶ Me ▶ Yardım merkezi ▶ Donanım

- 2 Ev kullanımında daha fazla etiket tasarımı için NIIM uygulamasını indirin.



NIIM

Tasarım ve Baskı Uygulaması
indirmesi ve kullanımı kolay



02. Bilgisayar Sürümünü İndirin


NIIMBOT'un resmi web sitesindeki (www.niimbot.com) yazılım indirme sayfasına giderek "NIIMBOT"un bilgisayar sürümünü indirip kurabilirsiniz.

Not: Bilgisayarı bu cihaza bağlamak için lütfen resmi olarak sağlanan veri kablosunu veya veri iletimini destekleyen bir veri kablosunu kullanın.

04

Baskı için Bağlantı

- 1 Uygulama indirildikten sonra, telefonunuzun Bluetooth'unun açık olduğundan emin olun.
 ※ Not: Android telefonlarda konum izinlerinin etkinleştirilmesi gerekebilir.

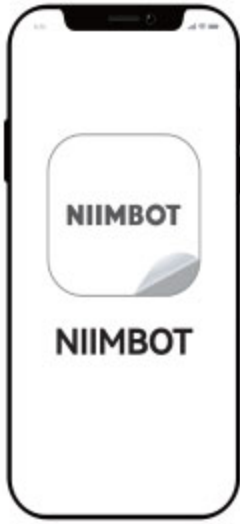

Bluetooth'u Açın ✓

- 2 Uygulamayı açın ve bağlanmak istediğiniz Bluetooth cihazlarını arayın.
 ※ Not: PIN kodu istenirse, 0000 veya 1234 girin ve ardından Tamam'a basın.
- 3 Başarıyla bağlandıktan sonra, Çizim Tahtasına gidin.

Not

Bu başlangıç kılavuzundaki ürün, aksesuar, yazılım arayüzü vb. görselleri yalnızca örnek niteliğindedir ve referans amaçlıdır. Ürün güncellemeleri ve iyileştirmeleri nedeniyle, fiziksel ürün görsellerden biraz farklılık gösterebilir. Bu durumda lütfen gerçek fiziksel ürüne bakın. Ürün, önceden haber verilmeksizin teknik iyileştirmelere tabidir.

05

Temel İşlemler

İşlev	İşlem
Açma	Güç düğmesini üç saniye basılı tutun
Kapatma	Cihaz açıkken güç düğmesini üç saniye basılı tutun
Kağıt Besleme	Cihaz açıkken güç düğmesini üç saniye basılı tutun
Test Sayfası Yazdırma	Cihaz açıkken güç düğmesine iki kez basın

06

Gösterge Işıklarının Anlamı

Gösterge Işığı	Durum	Anlamı
Mavi	Yanıp Sönüyor	Yazılım güncellemesi
Mavi	Sabit Yanıyor	Bekleme
Yeşil	Yanıp Sönüyor	Yazdırma
Yeşil	Sabit Yanıyor	Bluetooth bağlantısı kuruldu
Kırmızı	Yanıp Sönüyor	Şarj oluyor (Cihaz kapalıyken, pil tamamen şarj olduğunda ışık söner)
Kırmızı	Sabit Yanıyor	Cihaz arızası

07

Teknik Özellikler




Ürün	Etiket Yazıcı	Model	NIIMBOT B21_Pro
Boyutlar	130*94*61mm	Ağırlık	320g
Şarj Süresi	3-4 saat	Giriş	5V DC, 1A
Pil Kapasitesi	1500mAh	Baskı Yöntemi	Termal baskı
Baskı Çözünürlüğü	300dpi	Baskı Genişliği	48mm
Bağlantı	Bluetooth, Type-C	Şarj	Type-C
İletim Gücü	4dBm (Maksimum)	Çalışma Sıcaklığı	0°C -40°C

08

Güvenlik Önlemleri

Ürünün düzgün çalışmasını sağlamak için lütfen kullanmadan önce bu kılavuzdaki tüm talimatları ve uyarıları dikkatlice okuyun. cihazınız ve güvenliğiniz.

*Uyarılar

		
Ürünü yetkisiz olarak sökmeyin. Demonte edilmiş ürünler iade edilemez veya değiştirilemez.	Ürünü aşındırıcı kimyasallar veya temizlik maddeleriyle silmeyin.	Ürünü benzin istasyonları veya yakıt depoları gibi yanıcı maddelerin bulunduğu yerlerin yakınında kullanmayın.

1. Lütfen ürünü ve aksesuarlarını çocukların erişemeyeceği yerde saklayın. Bunlar, bir vasinin gözetimi ve rehberliği altında kullanılmalıdır;
2. Ürünün içine su girdiğinde gücü hemen kapatın;
3. Üründe herhangi bir arıza olması durumunda gücü derhal kapatın;
4. Güç adaptörü kullanmak istiyorsanız, her zaman güvenli, yönetmeliklere uygun ve uyumlu bir adaptör kullanın; patlamaya neden olabilir;
5. Pilini değiştirmek için ürünü sökmeyin. Yanlış kullanım sonucu hasar oluşabilir.

6. Pil, özel bir koruma devresi ve cihazı içerir; lütfen yetkisiz olarak pili sökmeyin, aksi takdirde kısa devreye veya sızıntıya neden olabilir. Elektrolit gözünüze kaçarsa, derhal suyla yıkayın ve tıbbi yardım alın;
7. Ürünü ve güç adaptörünü yüksek sıcaklığa veya yüksek neme maruz bırakmayın. Suya koymayın, aksi takdirde kısa devre meydana gelebilir ve pil ısınabilir, duman çıkarabilir, deforme olabilir, hasar görebilir veya hatta patlayabilir;
8. Üründen veya güç adaptöründen duman veya koku gelirse, lütfen güç adaptörünü hemen fişten çekin ve yanıklardan kaçınin.

*Önemli

1. Baskı kalitesi sorunlarını veya baskı kafası hasarını önlemek için lütfen NIIMBOT etiket kağıdı kullanın;
2. Pil yeterli güç sağlayamadığında lütfen ürünü kullanmayı derhal bırakın; Ürün dahili şarj edilebilir bir pil ile
3. birlikte gelir. Ateşe atmayın veya ısıtmayın. Aşırı ısınmaya, yangına veya patlamaya neden olabileceğinden, ürünü sıcak bir yerde şarj etmeyin, kullanmayın veya saklamayın.