

61.5mm

100.5mm

Monitor 3 Mini User Manual · 01
Manual de usuario de Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 10
Xiaomi Intelligente Temperatur- und Feuchtigkeitsanzeige 3 Mini Bedienungsanleitung · 19
Manuel d'utilisation du Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 28
Manuale utente Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 37
Manual do utilizador do Monitor de temperatura e humidade inteligente Xiaomi 3 Mini · 46
Руководство пользователя датчика температуры и влажности Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 55
Manual do usuário do Monitor de Temperatura e Umidade Inteligente Xiaomi 3 Mini · 64
Xiaomi 温湿度計 3 Mini 使用说明书 · 73
Mini 3 温湿度計 3 Mini 使用说明书 · 82
Instrukcja obsługi inteligentnego monitora temperatury i wilgotności Xiaomi 3 Mini · 91
Xiaomi スマート温湿度計 3 Mini 取扱説明書 · 100

Xiaomi 3 Mini · 109

封面

英语

xiaomi

Smart Temperature and Humidity Monitor 3 Mini

Kullanım Klavuzu

Read this manual carefully before use, and retain it for future reference.

Product Overview

Front

- Long Battery Life Mode Icon
- Top Ventilation Hole
- LCD Screen
- Battery
- Insulation Film
- Low Battery Icon
- Temperature
- Humidity
- Comfort Level Icon

Rear

- Back Ventilation Holes
- Adhesive Area
- Battery Cover Opening
- Adhesive Sticker

Notes:

- Do not obstruct the ventilation holes when installing or using the monitor.
- Buttons is used for Bluetooth connection and resetting the monitor.
- Remove the battery insulation film when using the monitor for the first time.
- The LCD screen may show water ripples due to static electricity or external pressure, but this is not an error. It will go back to normal after a period of rest.

D1


封面背面

Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.

Connecting with the Xiaomi Home App

This product works with the Xiaomi Home app. Control your device with Xiaomi Home app. Scan the QR code to download and install the app. You will be directed to the connection setup page if the app is installed already. Or search for "Xiaomi Home" in the app store to download and install it.

Open the Xiaomi Home app, tap "+" on the upper right, and then follow the instructions to add your device.



F9B6E7F1

Notes: If the monitor is not added within 30 minutes after being turned on for the first time, reset it or re-install the battery and turn it on again before adding it. The version of the app might have been updated, please follow the instructions based on the current app version.

D2

Smart Scenes

Connect the monitor to the Xiaomi Home app. On the homepage of the monitor, plug in, tap the icon "+" in the upper right corner, then select "Automation". Follow the on-screen instructions to set up smart scenes with other smart devices.

Note: Smart scenes are compatible only with the Xiaomi Home devices supporting the Bluetooth gateway function. Please contact customer service for more information.

How to Install

Placement: Place the monitor on the surface of a platform such as a table or a bookshelf.

Hanging: Remove the release liner from one side of the adhesive sticker and stick it in the adhesive area on the back of the monitor. Then, remove the release liner on the other side and stick the monitor in the desired place on a wall or other smooth surface.

Notes:

- Before hanging the monitor, select a position with a suitable visual angle and height. It is recommended to install it no higher than 2 meters.
- Stick to surfaces suitable for double-sided adhesive use. It is recommended not to stick the monitor to dusty (like glassboard or concrete) or uneven surfaces to prevent monitor damage due to falling.
- Press the monitor for about 10 seconds when sticking to complete installation.

D3

Screen Display

Comfort level icon description

Temperature	Below 19°C	Between 19°C and 22°C	Above 22°C
Humidity	(~)	(~)	(~)
Below 20%	(~)	(~)	(~)
Between 20% and 85%	(~)	(~)	(~)
Above 85%	(~)	(~)	(~)

(~) indicates status of comfort;
(~) indicates status of discomfort.

Low battery notification

The display of this icon () at the top of the screen indicates a low battery level. Replace the battery.


Button Functions

Operation	Status
Press button	1. Confirm binding to the monitor 2. Enable Bluetooth broadcast
Press and hold button for approx. 7 seconds	Restore factory settings

D4

Battery Replacement

Remove the battery cover from the cover opening at the bottom of the monitor. Remove the depleted battery and install a CR2450 coin battery with the positive (+) side facing upwards, then securely reinstall the cover.



Daily Care & Maintenance

- Please avoid water ingress into the monitor during cleaning.
- Dirt on the monitor surface can be wiped clean using a damp soft cloth with some neutral detergent.

Precautions

- The monitor is not waterproof; do not submerge its ventilation holes in water.
- Do not remove the monitor from a wall with force if it is attached with the adhesive sticker, so as to avoid damage to the wall or the monitor.
- The monitor is not suitable for use in environments with temperatures below 0°C.
- The provided battery is for trial use only, possibly unable to provide the same battery life as the standard new battery.
- Use the specified battery model for replacement and dispose of the used battery according to relevant national regulations.

D5

This product is intended for data reference to promote healthy living and should not be used as a measuring tool.

Troubleshooting

Errors	Possible causes	Solutions
The screen displays a low battery icon () or no content.	The battery is depleted.	Replace the battery.
The screen displays no content.	The battery is installed incorrectly.	Reinstall the battery correctly.
The screen displays "H".	Ambient temperature exceeds 60°C.	Place the monitor in an environment within its temperature measurement range.
The screen displays "L".	Ambient temperature is below -9°C.	Allow the monitor to rest for a while to return to normal.
The screen exhibits water ripples.	External pressure or static electricity	Remove any obstructions.
Temperature/humidity readings are inaccurate.	The ventilation holes are blocked. Water gets into the ventilation holes.	Remove any obstructions. Dry the monitor in a well-ventilated area or use absorbent paper to wipe it dry.

D6

Specifications

Name: Xiaomi Smart Temperature and Humidity Monitor 3 Mini
Model: MJWS06MMMC
Material: ABS
Item Dimensions: 53 x 45.3 x 13 mm
Net Weight: 30 g
Rated Voltage: 3 V
Max. Power: 51 mW
Battery Model: CR2450 (Installed)
Wireless Connectivity: Bluetooth Low Energy 5.0
Temperature Measurement Range: 0°C to 60°C
Temperature Display Resolution: 0.1°C
Humidity Measurement Range: 0-99% RH
Humidity Display Resolution: 1% RH
Bluetooth Operation Frequency: 2402-2480 MHz
Bluetooth Maximum Output Power: 13 dBm

The product nameplate is placed on the back of the monitor. The 8th to the 10th digits in the SN code on the product and the package represent the factory code.

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user.

Note:
The Bluetooth ® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Xiaomi Inc. is under license. All product names, trademarks and registered trademarks are property of their respective owners.

D7

Hereby, Xiaomi Communications Co., Ltd. declares that the radio equipment type MJWS06MMMC is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://www.mi.com/global/service/support/declaration.html>

All products bearing this symbol are waste electrical and electronic equipment (WEEE) as in directive 2012/19/EU which should not be mixed with unsorted household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

The product is in compliance with comply UK PSTI regulations, the full text of declaration of conformity is available at the following internet address: <https://www.mi.com/global/service/support/declaration.html>

EU REP:
Xiaomi Technology Netherlands B.V.
Prinses Beatrixlaan 582, 2595BM, The Hague, The Netherlands
contact@support.mi.com
UK REP:
Xiaomi Technology UK Limited
Davidson House, Forbury Square, Reading, Berkshire RG1 3EU
contact@support.mi.com
Manufacturer: Xiaomi Communications Co., Ltd.
Address: #319, 9th Floor, Building 6, 33 Xiang Middle Road, Haidian District, Beijing, 100085, China
For further information, please go to www.mi.com

User Manual Version: V1.0

D8

AB uygunkluk beyanım tam metnime su internet adresinden ulaşabilirsiniz: <http://www.mi.com/global/service/support/declaration.html>

Bu sembolü taşıyan tüm ürünler, ayrılmaması evsel atıklarla karıştırılmaması gereken atık elektrikli ve elektronsal ekipmanlardır (2012/19/EU sayılı direktifteki WEEE).

Bunun yerine, atık ekipmanınız hükümet veya yerel makamlar tarafından atanmış, atık elektrikli ve elektronsal ekipmanları geri dönüştürme için belirlenmiş bir toplama noktasına teslim ederek insan sağlığını ve çevreyi korumalısınız. Doğru imha ve geri dönüşüm, çevre ve insan sağlığı üzerindeki olası olumsuz sonuçların önlenmesine yardımcı olacaktır. Bu tür toplama noktalarının yerel hükümet ve kuruluşları hakkında daha fazla bilgi için lütfen kurulumcu veya yerel makamlarla iletişime geçin.

Ürün etiketi monitörün arka kısmında yer almaktadır. Ürün ve ambalaj üzerindeki SN kodunun 8. ile 10. basamakları fabrika kodunu temsil eder. Normal kullanım koşullarında, bu ekipman ile kullanımı vücudu arasında anten için en az 20 cm mesafe bırakılmalıdır.

Bluetooth kelime (şareti) ve logoları, Bluetooth SIG, Inc.'e ait tescilli ticari markalardır ve Xiaomi Inc. tarafından bu (şaretileri) kullanımı lisans altında yapılmaktadır. Tüm ürün adları, ticari markalar ve tescilli ticari markalar ilgili sahiplerinin mülkiyetindedir.

Üretici ve Adres Bilgileri (image_3e3d3c.png)
Su şareti için üretici: Xiaomi Communications Co., Ltd.
Üretici: Qingdao Yeelink Information Technology Co., Ltd. (MI Ekosisteminde yer alan şirketlerden biri)
Adres: 10F-84, Bina B, Qingdao Uluslararası İnovasyon Parkı, No.1 Kejiazui Weiyi Yolu, Laoshan Bölgesi, Qingdao Şehri, Shandong Eyaleti, Çin Halk Cumhuriyeti

Daha fazla bilgi için: Lütfen www.mi.com adresine gidin

User Manual Version: V1.0

D9

西语

xiaomi

Smart Temperature and Humidity Monitor 3 Mini

Kullanım Klavuzu

Kullanmadan önce lütfen okuyunuz.

Ürün Özellikleri

On

- Uzun batarya ömrü modu ikonu
- Uzun batarya ömrü modu ikonu
- Düşük batarya ikonu
- İki yönlü iletişim için Bluetooth ikonu
- LCD ekran
- Pil
- İki yönlü iletişim için Bluetooth ikonu
- İki yönlü iletişim için Bluetooth ikonu
- Nem
- Konfor seviyesi ikonu

Arka

- Arka havalandırma
- Yapışkan alan
- Pil kapaklı
- Yapışkan Sticker

Notes:

- Monitörü kurarken veya kullanırken havalandırma deliklerini kapatmayın.
- Düğme Bluetooth bağlantısı ve monitörü sıfırlamak için kullanılır.
- Monitörü ilk kez kullanırken pil yalıtım filmini çıkarın.
- Statik elektrik veya diğer basınç nedeniyle LCD ekranda su damlacıkları görülebilir, ancak bu bir hata değildir. Bir süre bekledikten sonra normale döner.

D1

Kullanım klavuzundaki ürün, aksesuarlar ve kullanıcı arayüzüne ait görseller yalnızca referans amaçlıdır. Ürün ve işlevler, ürün geliştirmeleri nedeniyle değişiklik gösterebilir.

Xiaomi Home Uygulaması ile Bağlantı Kurma

Bu ürün Xiaomi Home uygulaması ile çalışır. Çihazınız Xiaomi Home uygulaması ile kontrol edilebilir.

Uygulamayı indirmek ve yüklemek için QR kodunu tarayın. Uygulama zaten yüklediyseniz, bağlantı kurulum sayfasına yönlendirileceksiniz. Ya da uygulama mağazasından "Xiaomi Home" araması yaparak indirip yükleyin.

Xiaomi Home uygulamasını açın, sağ üstteki "+" simgesine dokunun ve ardından cihazınıza eklemek için talimatları izleyin.



F9B6E7F1

Notes: Monitör ilk açıldığında sonra 30 dakika içinde eklenmezse, cihazı sıfırlayın veya pil yeniden takıp tekrar açın ve ardından ekleme işlemini gerçekleştirin. Uygulamanın sürümü güncellenmiş olabilir, lütfen mevcut uygulama sürümüne göre talimatları izleyin.

D2

Akıllı Ekranlar

Monitörü Xiaomi Home uygulamasına bağlayın. Monitör ekranının ana sayfasında, sağ üst köşedeki "+" simgesine dokunarak, ardından "Otomasyon"u seçin. Diğer akıllı cihazlarla akıllı sahneler oluşturmak için ayrıntılı talimatları izleyin.

Note: Akıllı sahneler yalnızca Bluetooth ağı geçişi işlevini destekleyen Xiaomi Home cihazlarıyla uyumludur. Daha fazla bilgi için lütfen müşteri hizmetleriyle iletişime geçin.

Montaj

Yerleştirme: Monitörü bir masa veya kitaplık gibi bir platformun yüzeyine yerleştirin.

Açma: Yapışkan etiketleri bir taraftaki deliklere fişli çıkarın ve monitörün arkasındaki yapışkan alana yapıştırın. Ardından, diğer taraftaki konuyu fişli çıkarın ve monitörü duvara veya başka düz bir yüzeye istenilen yere yapıştırın.

Notlar:
Monitörü asmaadan önce, uygun bir görüş açısı ve yükseklik seçtiğiniz bir konum seçin, 2 metreden daha yüksek bir yere monte edilmemesi önerilir.
Çift taraflı yapışkan kullanıma uygun yüzeylere yapıştırın. Monitörü tuttuğunuz alanın alan veya betonü veya diğer yüzeylere yapışmasını önlemek için, düğme nedeniyle monitörün zarar görmesini önlemek için.
Yapıştırmaya başlamadan önce, monitörü yaklaşık 10 saniye boyunca bastırın.

Tuş Fonksiyonları

Operasyon	Durum
Tuşa bas	1. Monitöre bağlanılır 2. Bluetooth açılır
Tuşa 7 sn basılı tut	Fabrika ayarlarına dön

D3

Ekran

Konfort seviyesi

Nem	19°C Altı	19°C ve 22°C Arası	22°C Üstü
20% Altı	(~)	(~)	(~)
20% ve 85% Arası	(~)	(~)	(~)
85% üstü	(~)	(~)	(~)

(~) Konforlu;
(~) Konforsuz.

() Düşük Pil ikonu


Tuş Fonksiyonları

Operasyon	Durum
Tuşa bas	1. Monitöre bağlanılır 2. Bluetooth açılır
Tuşa 7 sn basılı tut	Fabrika ayarlarına dön

D4

Pil Değiştirme

Monitörün alt kısmındaki kapak açma yerinden pil kapakçığını çıkarın. Bitmiş pil çıkarın ve pozitif (+) tarafı yukarı bakacak şekilde bir CR2450 düğme pil takın, ardından kapakı güvenli bir şekilde yeniden yerine yerleştirin.



Günlük Bakım

- Temizlik sırasında monitöre su girmemesine dikkat edin.
- Monitör yüzeyindeki kir, biraz nötr deterjan kullanılarak nemli ve yumuşak bir bezle silinerek temizlenebilir.

Tedbirler

- Monitör su geçirmez değildir; havalandırma deliklerini suya batırın.
- Monitör yapışkan etiketle duvara sabitlenmişse, duvarı veya monitörün zarar görmemesi için monitörü zorla çıkarmayın.
- Monitör, 0°C'in altında kaldıklarında sahip ortamlarda kullanıma uygun değildir.
- Sajılanan pil yalnızca deneme amaçlıdır; standart yeni pil kadar uzun ömürlü olmayabilir.
- Düğme için belirlenmiş pil modeli kullanın ve kullanılan pilli ilgili düzenlemelere uygun şekilde imha edin.

D5

Bu ürün, sağlığı yaygın tehlikelerle amacıyla veri referansı için tasarlanmıştır ve bir ölçüm aacı olarak kullanılmamalıdır.

Sorun Çözme

Hatalar	Olası Nedenler	Çözümler
Pil bitti ikonu	Pil bitmiştir	Pil değiştirin
Ekranda hiç bir yazı olmaması	Pil hatalı monte edilmiştir	Pil yeniden yerleştirin
Ekranda da gözükür "H".	60°C üzerindedir	Çihaz doğru konumlandırın.
Ekranda da gözükür "L".	-9°C altındadır.	Çihaz normalde gerektirilen kadar kapatın
Ekranda nem izi gözükür ise	Dış basınç yada elektrik	Çihaz normale geriye kadar kapatın
İve nem yanlış ölçülür ise	Havalandırma delikleri tıkalı olabilir Havalandırma deliklerinde su girmiş olabilir	Araştırma engelbri kaldırın Kuru bir bez ile silin ve kurumasına bekleyin

D6

Specifications

Adı: Xiaomi Akıllı Sıcaklık ve Nem Monitörü 3 Mini
Model: MJWS06MMMC
Malzeme: ABS
Ölçüm boyutu: 53 x 45,3 x 13 mm
Net Ağırlık: 30 g
Nominal Voltaj: 3 V
Maksimum Güç: 51 mW
Pil Modeli: CR2450 (Takılı)
Kablosuz Bağlantı: Bluetooth Low Energy 5.0
Sıcaklık Gösterim Çözünürlüğü: 0.1°C
Nem Ölçüm Aralığı: 100 - 100% RH
Nem Gösterim Çözünürlüğü: 1% RH
Bluetooth Çalışma Frekansı: 2402 - 2480 MHz
Bluetooth Maksimum Çıkış Gücü: 13 dBm

Ürün etiketi monitörün arka kısmında yer almaktadır. Ürün ve ambalaj üzerindeki SN kodunun 8. ile 10. basamakları fabrika kodunu temsil eder. Normal kullanım koşullarında, bu ekipman ile kullanımı vücudu arasında anten için en az 20 cm mesafe bırakılmalıdır.

Bluetooth kelime (şareti) ve logoları, Bluetooth SIG, Inc.'e ait tescilli ticari markalardır ve Xiaomi Inc. tarafından bu (şaretileri) kullanımı lisans altında yapılmaktadır. Tüm ürün adları, ticari markalar ve tescilli ticari markalar ilgili sahiplerinin mülkiyetindedir.

Üretici ve Adres Bilgileri (image_3e3d3c.png)
Su şareti için üretici: Xiaomi Communications Co., Ltd.
Üretici: Qingdao Yeelink Information Technology Co., Ltd. (MI Ekosisteminde yer alan şirketlerden biri)
Adres: 10F-84, Bina B, Qingdao Uluslararası İnovasyon Parkı, No.1 Kejiazui Weiyi Yolu, Laoshan Bölgesi, Qingdao Şehri, Shandong Eyaleti, Çin Halk Cumhuriyeti

Daha fazla bilgi için: Lütfen www.mi.com adresine gidin

User Manual Version: V1.0

D7

AB uygunkluk beyanım tam metnime su internet adresinden ulaşabilirsiniz: <http://www.mi.com/global/service/support/declaration.html>

Bu sembolü taşıyan tüm ürünler, ayrılmaması evsel atıklarla karıştırılmaması gereken atık elektrikli ve elektronsal ekipmanlardır (2012/19/EU sayılı direktifteki WEEE).

Bunun yerine, atık ekipmanınız hükümet veya yerel makamlar tarafından atanmış, atık elektrikli ve elektronsal ekipmanları geri dönüştürme için belirlenmiş bir toplama noktasına teslim ederek insan sağlığını ve çevreyi korumalısınız. Doğru imha ve geri dönüşüm, çevre ve insan sağlığı üzerindeki olası olumsuz sonuçların önlenmesine yardımcı olacaktır. Bu tür toplama noktalarının yerel hükümet ve kuruluşları hakkında daha fazla bilgi için lütfen kurulumcu veya yerel makamlarla iletişime geçin.

Ürün etiketi monitörün arka kısmında yer almaktadır. Ürün ve ambalaj üzerindeki SN kodunun 8. ile 10. basamakları fabrika kodunu temsil eder. Normal kullanım koşullarında, bu ekipman ile kullanımı vücudu arasında anten için en az 20 cm mesafe bırakılmalıdır.

Bluetooth kelime (şareti) ve logoları, Bluetooth SIG, Inc.'e ait tescilli ticari markalardır ve Xiaomi Inc. tarafından bu (şaretileri) kullanımı lisans altında yapılmaktadır. Tüm ürün adları, ticari markalar ve tescilli ticari markalar ilgili sahiplerinin mülkiyetindedir.

Üretici ve Adres Bilgileri (image_3e3d3c.png)
Su şareti için üretici: Xiaomi Communications Co., Ltd.
Üretici: Qingdao Yeelink Information Technology Co., Ltd. (MI Ekosisteminde yer alan şirketlerden biri)
Adres: 10F-84, Bina B, Qingdao Uluslararası İnovasyon Parkı, No.1 Kejiazui Weiyi Yolu, Laoshan Bölgesi, Qingdao Şehri, Shandong Eyaleti, Çin Halk Cumhuriyeti

Daha fazla bilgi için: Lütfen www.mi.com adresine gidin

User Manual Version: V1.0

D8

AB uygunkluk beyanım tam metnime su internet adresinden ulaşabilirsiniz: <http://www.mi.com/global/service/support/declaration.html>

Bu sembolü taşıyan tüm ürünler, ayrılmaması evsel atıklarla karıştırılmaması gereken atık elektrikli ve elektronsal ekipmanlardır (2012/19/EU sayılı direktifteki WEEE).

Bunun yerine, atık ekipmanınız hükümet veya yerel makamlar tarafından atanmış, atık elektrikli ve elektronsal ekipmanları geri dönüştürme için belirlenmiş bir toplama noktasına teslim ederek insan sağlığını ve çevreyi korumalısınız. Doğru imha ve geri dönüşüm, çevre ve insan sağlığı üzerindeki olası olumsuz sonuçların önlenmesine yardımcı olacaktır. Bu tür toplama noktalarının yerel hükümet ve kuruluşları hakkında daha fazla bilgi için lütfen kurulumcu veya yerel makamlarla iletişime geçin.

Ürün etiketi monitörün arka kısmında yer almaktadır. Ürün ve ambalaj üzerindeki SN kodunun 8. ile 10. basamakları fabrika kodunu temsil eder. Normal kullanım koşullarında, bu ekipman ile kullanımı vücudu arasında anten için en az 20 cm mesafe bırakılmalıdır.

Bluetooth kelime (şareti) ve logoları, Bluetooth SIG, Inc.'e ait tescilli ticari markalardır ve Xiaomi Inc. tarafından bu (şaretileri) kullanımı lisans altında yapılmaktadır. Tüm ürün adları, ticari markalar ve tescilli ticari markalar ilgili sahiplerinin mülkiyetindedir.

Üretici ve Adres Bilgileri (image_3e3d3c.png)
Su şareti için üretici: Xiaomi Communications Co., Ltd.
Üretici: Qingdao Yeelink Information Technology Co., Ltd. (MI Ekosisteminde yer alan şirketlerden biri)
Adres: 10F-84, Bina B, Qingdao Uluslararası İnovasyon Parkı, No.1 Kejiazui Weiyi Yolu, Laoshan Bölgesi, Qingdao Şehri, Shandong Eyaleti, Çin Halk Cumhuriyeti

Daha fazla bilgi için: Lütfen www.mi.com adresine gidin

User Manual Version: V1.0

D9

Monitor 3 Mini User Manual · 01

Manual de usuario de Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 10

Xiaomi Intelligente Temperatur- und Feuchtigkeitsanzeige 3 Mini Bedienungsanleitung · 19

Manuel d'utilisation du Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 28

Manuale utente Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 37

Manual do utilizador do Monitor de temperatura e humidade inteligente Xiaomi 3 Mini · 46

Руководство пользователя датчика температуры и влажности Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 55

Manual do usuário do Monitor de Temperatura e Umidade Inteligente Xiaomi 3 Mini · 64

Xiaomi 温湿度計 3 Mini 取扱説明書 · 73

دليل مستخدم جهاز قياس درجة الحرارة ونسبة الرطوبة الذكي Mini 3 من Xiaomi · 82

Instrukcja obsługi inteligentnego monitora temperatury i wilgotności Xiaomi 3 Mini · 91

Xiaomi スマート温湿度計 3 Mini 取扱説明書 · 100

Xiaomi 3

Panduan Pengguna Xiaomi Smart Temperature and Humidity Monitor 3 Mini · 118


Xiaomi 藍牙温湿度計 3 mini 使用說明書 · 127




Read this manual carefully before use, and retain it for future reference.

Product Overview

Front

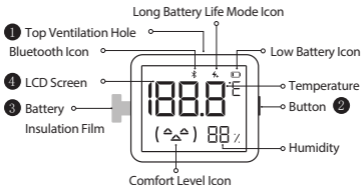

Rear

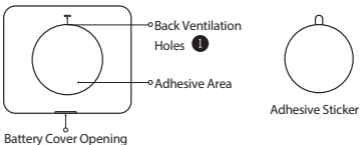

Notes:

- 1 Do not obstruct the ventilation holes when installing or using the monitor.
- 2 Button: It is used for Bluetooth connection and resetting the monitor.
- 3 Remove the battery insulation film when using the monitor for the first time.
- 4 The LCD screen may show water ripples due to static electricity or external pressure, but this is not an error. It will go back to normal after a period of rest.

Illustrations of product, accessories, and user interface in the user manual are for reference purposes only. Actual product and functions may vary due to product enhancements.

Connecting with the Xiaomi Home App

This product works with the Xiaomi Home app. Control your device with Xiaomi Home app.

Scan the QR code to download and install the app. You will be directed to the connection setup page if the app is installed already. Or search for "Xiaomi Home" in the app store to download and install it.

Open the Xiaomi Home app, tap "+" on the upper right, and then follow the instructions to add your device.



F9B6E7F1

Notes: If the monitor is not added within 30 minutes after being turned on for the first time, reset it or re-install the battery and turn it on again before adding it.

The version of the app might have been updated, please follow the instructions based on the current app version.

Smart Scenes

Connect the monitor to the Xiaomi Home app. On the homepage of the monitor plug-in, tap the icon " " in the upper right corner, then select "Automation". Follow the on-screen instructions to set up smart scenes with other smart devices.

Note: Smart scenes are compatible only with the Xiaomi Home devices supporting the Bluetooth gateway function. Please contact customer service for more information.


How to Install

Placement: Place the monitor on the surface of a platform such as a table or a bookshelf.

Hanging: Remove the release liner from one side of the adhesive sticker and stick it in the adhesive area on the back of the monitor. Then, remove the release liner on the other side and stick the monitor in the desired place on a wall or other smooth surface.

Notes:

1. Before hanging the monitor, select a position with a suitable visual angle and height. It is recommended to install it no higher than 2 meters;
2. Stick to surfaces suitable for double-sided adhesive use. It is recommended not to stick the monitor to dusty (like plasterboard or concrete) or uneven surfaces to prevent monitor damage due to falling;
3. Press the monitor for about 10 seconds when sticking to complete installation.



Screen Display


Comfort level icon description

Temperature Humidity	Below 19°C	Between 19°C and 27°C	Above 27°C
Below 20%	(- ^ -)	(- ^ -)	(- ^ -)
Between 20% and 85%	(- ^ -)	(^ _ ^)	(- ^ -)
Above 85%	(- ^ -)	(- ^ -)	(- ^ -)

(^ _ ^) indicates status of comfort;

(- ^ -) indicates status of discomfort.

Low battery notification


The display of this icon "  at the top of the screen indicates a low battery level. Replace the battery.

Button Functions

Operation	Status
Press button	1. Confirm binding to the monitor 2. Enable Bluetooth broadcast
Press and hold button for approx. 7 seconds	Restore factory settings

Battery Replacement

Remove the battery cover from the cover opening at the bottom of the monitor. Remove the depleted battery and install a CR2450 coin battery with the positive (+) side facing upwards, then securely reinstall the cover.



Daily Care & Maintenance


- Please avoid water ingress into the monitor during cleaning.
- Dirt on the monitor surface can be wiped clean using a damp soft cloth with some neutral detergent.

Precautions

- The monitor is not waterproof; do not submerge its ventilation holes in water.
- Do not remove the monitor from a wall with force if it is attached with the adhesive sticker, so as to avoid damage to the wall or the monitor.
- The monitor is not suitable for use in environments with temperatures below 0°C.
- The provided battery is for trial use only, possibly unable to provide the same battery life as the standard new battery.
- Use the specified battery model for replacement and dispose of the used battery according to relevant national regulations.

- This product is intended for data reference to promote healthy living and should not be used as a measuring tool.

Troubleshooting

Errors	Possible causes	Solutions
The screen displays a low battery icon "  or no content.	The battery is depleted.	Replace the battery.
The screen displays no content.	The battery is installed incorrectly.	Reinstall the battery correctly.
The screen displays " H".	Ambient temperature exceeds 60°C.	Place the monitor in an environment within its temperature measurement range.
The screen displays " L".	Ambient temperature is below -9.9°C.	
The screen exhibits water ripples.	External pressure or static electricity	Allow the monitor to rest for a while to return to normal.
Temperature/humidity readings are inaccurate.	The ventilation holes are blocked.	Remove any obstructions.
	Water gets into the ventilation holes.	Dry the monitor in a well-ventilated area or use absorbent paper to wipe it dry.

Specifications

Name: Xiaomi Smart Temperature and Humidity Monitor 3 Mini

Model: MJWSD06MMC

Material: ABS

Item Dimensions: 53 × 45.3 × 13 mm

Net Weight: 30 g

Rated Voltage: 3 V \equiv

Max. Power: 51 mW

Battery Model: CR2450 (Installed)

Wireless Connectivity: Bluetooth Low Energy 5.0

Temperature Measurement Range: 0°C to 60°C

Temperature Display Resolution: 0.1°C

Humidity Measurement Range: 0–99% RH

Humidity Display Resolution: 1% RH

Bluetooth Operation Frequency: 2402–2480 MHz

Bluetooth Maximum Output Power: 13 dBm

The product nameplate is placed on the back of the monitor.

The 8th to the 10th digits in the SN code on the product and the package represent the factory code.

Under normal use of condition, this equipment should be kept a separation distance of at least 20 cm between the antenna and the body of the user.

Note:

The Bluetooth [®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Xiaomi Inc. is under license. All product names, trademarks and registered trademarks are property of their respective owners.



Hereby, Xiaomi Communications Co., Ltd.

declares that the radio equipment type

MJWSD06MMC is in compliance with Directive

2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:

<http://www.mi.com/global/service/support/declaration.html>



All products bearing this symbol are waste electrical and electronic equipment (WEEE as in directive

2012/19/EU) which should not be mixed with unsorted

household waste. Instead, you should protect human health and the environment by handing over your waste equipment to a designated collection point for the recycling of waste electrical and electronic equipment, appointed by the government or local authorities. Correct disposal and recycling will help prevent potential negative consequences to the environment and human health. Please contact the installer or local authorities for more information about the location as well as terms and conditions of such collection points.

The product is in compliance with comply UK PSTI regulations, the full text of declaration of conformity is available at the following internet address:[https:// www.mi.com/global/service/support/declaration.html](https://www.mi.com/global/service/support/declaration.html)

EU REP.

Xiaomi Technology Netherlands B.V.

Prinses Beatrixlaan 582, 2595BM, The Hague, The Netherlands

contact@support.mi.com

UK REP.

Xiaomi Technology UK Limited

Davidson House, Forbury Square, Reading, Berkshire RG1 3EU

contact@support.mi.com

Manufacturer: Xiaomi Communications Co., Ltd.

Address: #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road,

Haidian District, Beijing, 100085, China

For further information, please go to www.mi.com

User Manual Version: V1.0